



Low VF Bridge Rectifiers

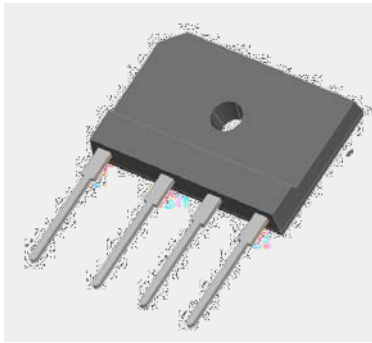

Features

Typical Applications



Mechanical Data

Package

Terminals

Polarity:

Maximum Ratings



GBJL2006

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBJL2006

Thermal Characteristics

PARAMETER	SYMBOL	UNIT	GBJL2006

Ordering Information

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics

FIG1:I_o-T_c Curve

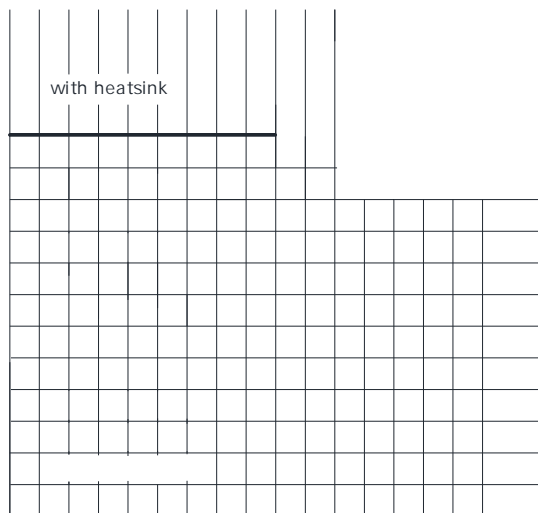


FIG2:Surge Forward Current Capability


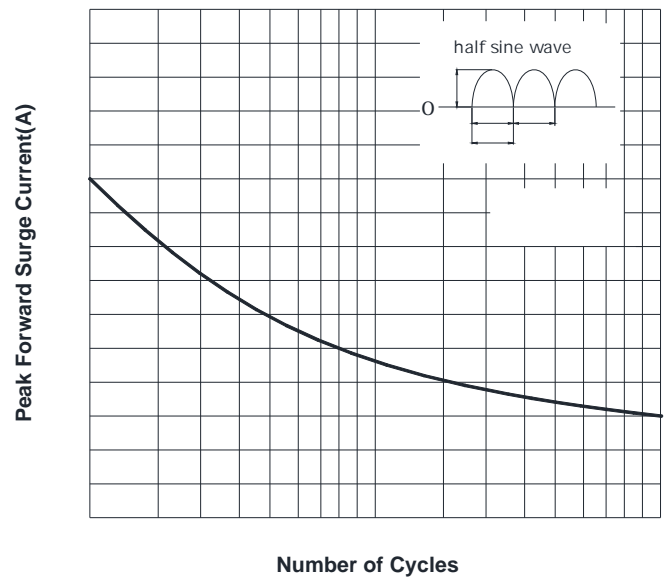




FIG4: Typical Reverse Characteristics

[illegible]

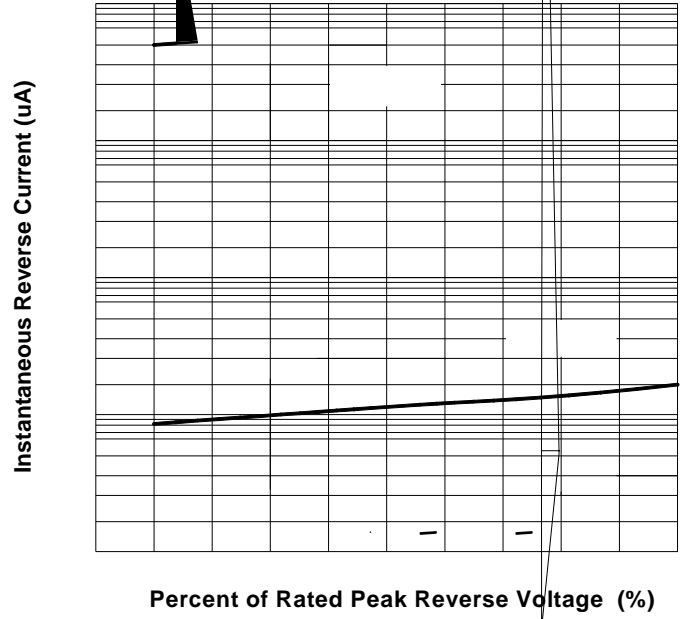

Disclaimer
